

**GROUNDWATER SAMPLING  
REPORT OF FINDINGS**

**FOR**

**SITE H-30  
MARINE CORPS BASE  
CAMP LEJEUNE, NORTH CAROLINA**

**NCDENR UST INCIDENT NO. 23091  
LAND USE CLASSIFICATION: RESIDENTIAL  
RISK CLASSIFICATION: LOW**

**OCTOBER 31, 2007**

**CONTRACT NO. N62470-05-D-6200  
DELIVERY ORDER NO. 0016  
CATLIN PROJECT NO. 205-077**



**PREPARED BY:**

**CATLIN ENGINEERS AND SCIENTISTS  
P. O. BOX 10279  
WILMINGTON, NORTH CAROLINA 28404-0279  
(910) 452-5861**

## TABLE OF CONTENTS

	<u>PAGE</u>
A. SITE IDENTIFICATION	1
B. BACKGROUND AND PURPOSE	2
C. METHODS	3
D. RESULTS	4
E. CONCLUSIONS AND RECOMMENDATIONS	4
F. REFERENCES	5

### TABLES

TABLE 1	SUMMARY OF GROUNDWATER LABORATORY RESULTS – MADEP VPH/EPH
---------	--

### FIGURES

FIGURE 1	SITE LOCATION MAP
FIGURE 2	SITE MAP WITH SUMMARY OF GROUNDWATER LABORATORY RESULTS

### APPENDICES

APPENDIX A	STANDARD PROCEDURES
APPENDIX B	BORING LOGS
APPENDIX C	LABORATORY ANALYTICAL REPORT AND CHAIN-OF-CUSTODY DOCUMENTATION

**A. SITE IDENTIFICATION**

DATE OF REPORT: October 31, 2007  
Facility ID: E-002740 UST Incident Number (if known): 23091  
Land Use Classification: Residential Risk Classification: Low  
Site Name: Site H-30  
Site Location: Blackwood Road, Marine Corps Base (MCB), Camp Lejeune (See Figure 1)  
Nearest City/Town: Jacksonville County: Onslow

UST Owner: Commanding Officer – MCB Camp Lejeune  
I&E/EMD/EQB  
Address: PSC 20004  
MCB Camp Lejeune, NC 28542 Phone: (910) 451-5068

UST Operator: Same as above  
Address: Same as above Phone: Same as above

Property Owner: Same as above  
Address: Same as above Phone: Same as above

Property Occupant: None  
Address: Blackwood Road, MCB, Camp Lejeune, Jacksonville, NC Phone: Unknown

Consultant/Contractor: CATLIN Engineers and Scientists  
Address: 220 Old Dairy Road, Wilmington, North Carolina 28405 Phone: (910) 452-5861


**Release Information**

Date Discovered: July 1992  
Longitude: 77°21'49" W Latitude: 34°40'37" N  
Estimated Quantity of Release: Unknown  
Cause of Release: Unknown

Source of Release (e.g. Piping/UST):  
Possible leaking UST and/or associated piping

Sizes and contents of UST system(s) from which the release occurred:  
Two, 560-gallon No. 2 fuel oil USTs used for heating the former men's servant's quarters for the Naval Hospital Clinic.

I, Michael E. Mason a Professional Engineer/Licensed Geologist (circle one) for CATLIN Engineers and Scientists, do certify that the information contained in this report is correct and accurate to the best of my knowledge.

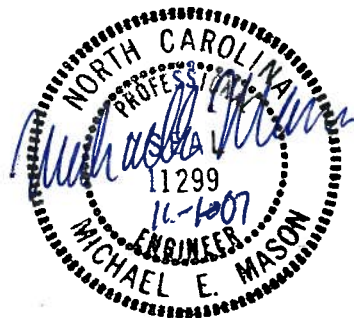

(Please Affix Seal and Signature)

## **B. BACKGROUND AND PURPOSE**

The project is located at former Building H-30 aboard Marine Corps Base (MCB) Camp Lejeune, North Carolina. Building H-30 was located in the Hospital Point Area and was heated using No. 2 fuel oil from two, 560-gallon underground storage tanks (USTs) (See Figure 2).

In July 1992, the USTs were removed and as part of the closure reporting requirements, soil samples were collected and laboratory analyzed. Laboratory results indicated that the UST system had released hydrocarbons into the subsurface.

The site has been the subject of a number of reports since the USTs were removed including a Three Well Site Check Report, a Site Assessment Report, a Risk Characterization Assessment Report, a Corrective Action Plan (CAP) and a number of Monitoring Reports. These investigations yielded the following findings: Free product was encountered in the subsurface of the site during the Leaking Underground Storage Tank Site Assessment in 1996; however, no free-product has been observed during any of the sampling events since beginning semi-annually in 1998. Dissolved hydrocarbons were discovered within the groundwater at the site; however, as of 2001 no concentrations were detected in excess of any established Gross Contaminant Levels (GCLs).

The Risk Characterization Assessment Report by LAW Engineering, Inc. (LAW) (1999) recommended that the site be classified as Intermediate Risk, based on the presence of free product encountered during tank closure activities. It was determined that the subject site may be classified as Low Risk once free product had been removed. Based on the fact that free product has not been detected at the site since 1998, the site should now qualify for Low Risk status.

In May 2005 Shaw completed a soil excavation and collected soil samples. The analytical results revealed all contaminants were below the Residential MSCCs. In June 2005 the North Carolina Department of Environment and Natural Resources (NCDENR) approved the site for No Further Action (NFA) with respect to site soils, however a Land Use Restriction (LUR) would remain in place because historical groundwater contaminant concentrations were above the 2L Groundwater Quality Standards (GWQSs).

The last groundwater sampling event was conducted in April 2001 and the results from this event revealed MADEP hydrocarbon fractions above the 2L GWQS in one monitoring well (USTH30-MW12). Therefore to receive NFA for groundwater at the subject site the groundwater in the area of this well would need to be resampled to determine if contaminant levels had naturally attenuated to below the 2L GWQS. Please note monitoring well USTH30-MW12 was abandoned during the May 2005 soil excavation. CATLIN conducted groundwater sampling in the area of former monitoring well USTH30-MW12 in July 2007 to evaluate current groundwater conditions at the site.

## **C. METHODS**

### **1. Field Methods**

All field work was conducted in general accordance with CATLIN's Standard Procedures provided in Appendix A. CATLIN personnel gathered subsurface soil data by Direct Push Technology (DPT) boring advancement using an AMS PowerProbe™ 9600D (PowerProbe) on July 27, 2007. When using the PowerProbe, the borings are advanced to depth by static force and a 90-pound hydraulic percussion hammer. Two and one-quarter inch diameter by four-foot length steel is used as casing. Soil samples are continuously collected in one and one-half inch clear liners. Liners are removed from the casing and then cut in half longitudinally to allow for visual/manual classification by the Unified Soil Classification System (USCS) and organic vapor analysis utilizing a Photo Ionization Detector (PID). A boring log for the USTH30-DPT01 boring is provided in Appendix B. The boring was installed in the vicinity of former USTH30-MW12, the location is illustrated on Figure 2.

Well materials were installed in an attempt to determine accurate water table measurements and facilitate groundwater sampling. The well was constructed with one inch slotted PVC well screen.

A depth to water (DTW) measurement was recorded and a grab groundwater sample was collected. The sample was collected on July 31, 2007 utilizing a peristaltic pump and new polyethylene tubing. The groundwater sample was labeled USTH30-DPT01.

New disposable nitrile gloves were worn during sampling activities. All samples were placed into the appropriately labeled glassware and packed on ice in an insulated cooler for transportation to the laboratory. Sample integrity was maintained by following proper Chain-of-Custody (COC) procedures. A copy of the COC is provided following the laboratory report in Appendix C.

The borehole was abandoned to the surface using three-eighth inch bentonite chips. Bentonite and water were poured into the borehole simultaneously to facilitate hydration.

### **2. Analytical Methods**

Samples were transported to SGS Environmental Services Inc. (NC Certification #481) in Wilmington, North Carolina. At the laboratory, the groundwater sample was analyzed for MADEP VPH/EPH.

## D. RESULTS

Field observations noted during soil boring advancement indicate site geology to be comprised of fine to silty sand from land surface to four feet Below Land Surface (BLS). Sandy clay was encountered from four to boring termination at 16 feet BLS. A boring log for the soil boring including organic vapor screening results is included in Appendix B. Groundwater depth as measured in the temporary monitoring well USTH30-DPT01 on July 31, 2007 was approximately 5.2 feet BLS.

Analytical results for the groundwater sample are included in Appendix C (Please note the sample from this site was included on the COC with additional sites. As a result, only the applicable pages from the lab report are included. Page numbers are not consecutive, as multiple sites were sampled during the same event.). The analytical results are summarized as follows.

### MADEP VPH/EPH

As indicated in Table 1 and illustrated Figure 2, analytical results from groundwater sample USTH30-DPT01 revealed the presence of the C<sub>9</sub>-C<sub>22</sub> Aromatics fraction at a concentration of <290 ug/L which is above the 2L GWQS of 210 ug/L for this compound. Please note the reported concentration of <290 ug/L is sum of the detected concentration of the C<sub>11</sub>-C<sub>22</sub> Aromatics fraction (190 ug/L) and the detection limit of the C<sub>9</sub>-C<sub>10</sub> Aromatics fraction (<100 ug/L). The groundwater sample from the site exhibited similar concentrations of MADEP constituents as compared to those reported from the last groundwater monitoring event in April 2001. All other MADEP fractions were detected at concentrations below the laboratory detection limits or the 2L GWQSs.

## E. CONCLUSIONS AND RECOMMENDATIONS

The C<sub>9</sub>-C<sub>22</sub> Aromatic concentration previously detected in groundwater at the H-30 site has not naturally attenuated to below the 2L GWQS of 210 µg/L. Current groundwater contaminant concentrations continue to prevent the site from qualifying for NFA without a groundwater LUR. CATLIN recommends resampling groundwater in two years.

## **F. REFERENCES**

CATLIN Engineers and Scientists. *Final Soil Assessment Report for Building H-30, MCB Camp Lejeune, NC*, June 22, 2004.

LAW Engineering, Inc. *Second Semi-Annual Groundwater Monitoring Report Building H-30-1 and H-30-2, MCB Camp Lejeune, NC*, May 23, 2001.

North Carolina Department of Environment and Natural Resources, *Guidelines for Assessment and Corrective Action, North Carolina Underground Storage Tank Section* (Effective July 1, 2001).

Shaw Environment and Infrastructure, Inc., *Former Building H-30 Soil Removal Report, MCB Camp Lejeune, NC*, June 1, 2005.

## **TABLES**

**TABLE 1**  
**SUMMARY OF GROUNDWATER LABORATORY RESULTS**  
**MADEP VPH/EPH**

H-30, MCB Camp Lejeune

Well ID	Contaminant of Concern →		C <sub>5</sub> -C <sub>8</sub> Aliphatics	C <sub>9</sub> -C <sub>18</sub> Aliphatics	C <sub>19</sub> -C <sub>36</sub> Aliphatics	C <sub>9</sub> -C <sub>22</sub> Aromatics
	Sample ID	Date Collected				
GCL (µg/L)			NE	NE	NE	NE
2L GWQS (µg/L)			420	4,200	42,000	210
USTH30-DPT01	USTH30-DPT01	7/31/2007	<100	<203	<100	<b>&lt;290</b>

All results in micrograms per liter (µg/L).

NE = None Established


< = Less than method detection limit

**Bold** results indicate concentrations above 2L GWQS or GCL

GCL = Gross Contaminant Level

2L GWQS = NCAC T15A:02L Groundwater Quality Standards

## FIGURES

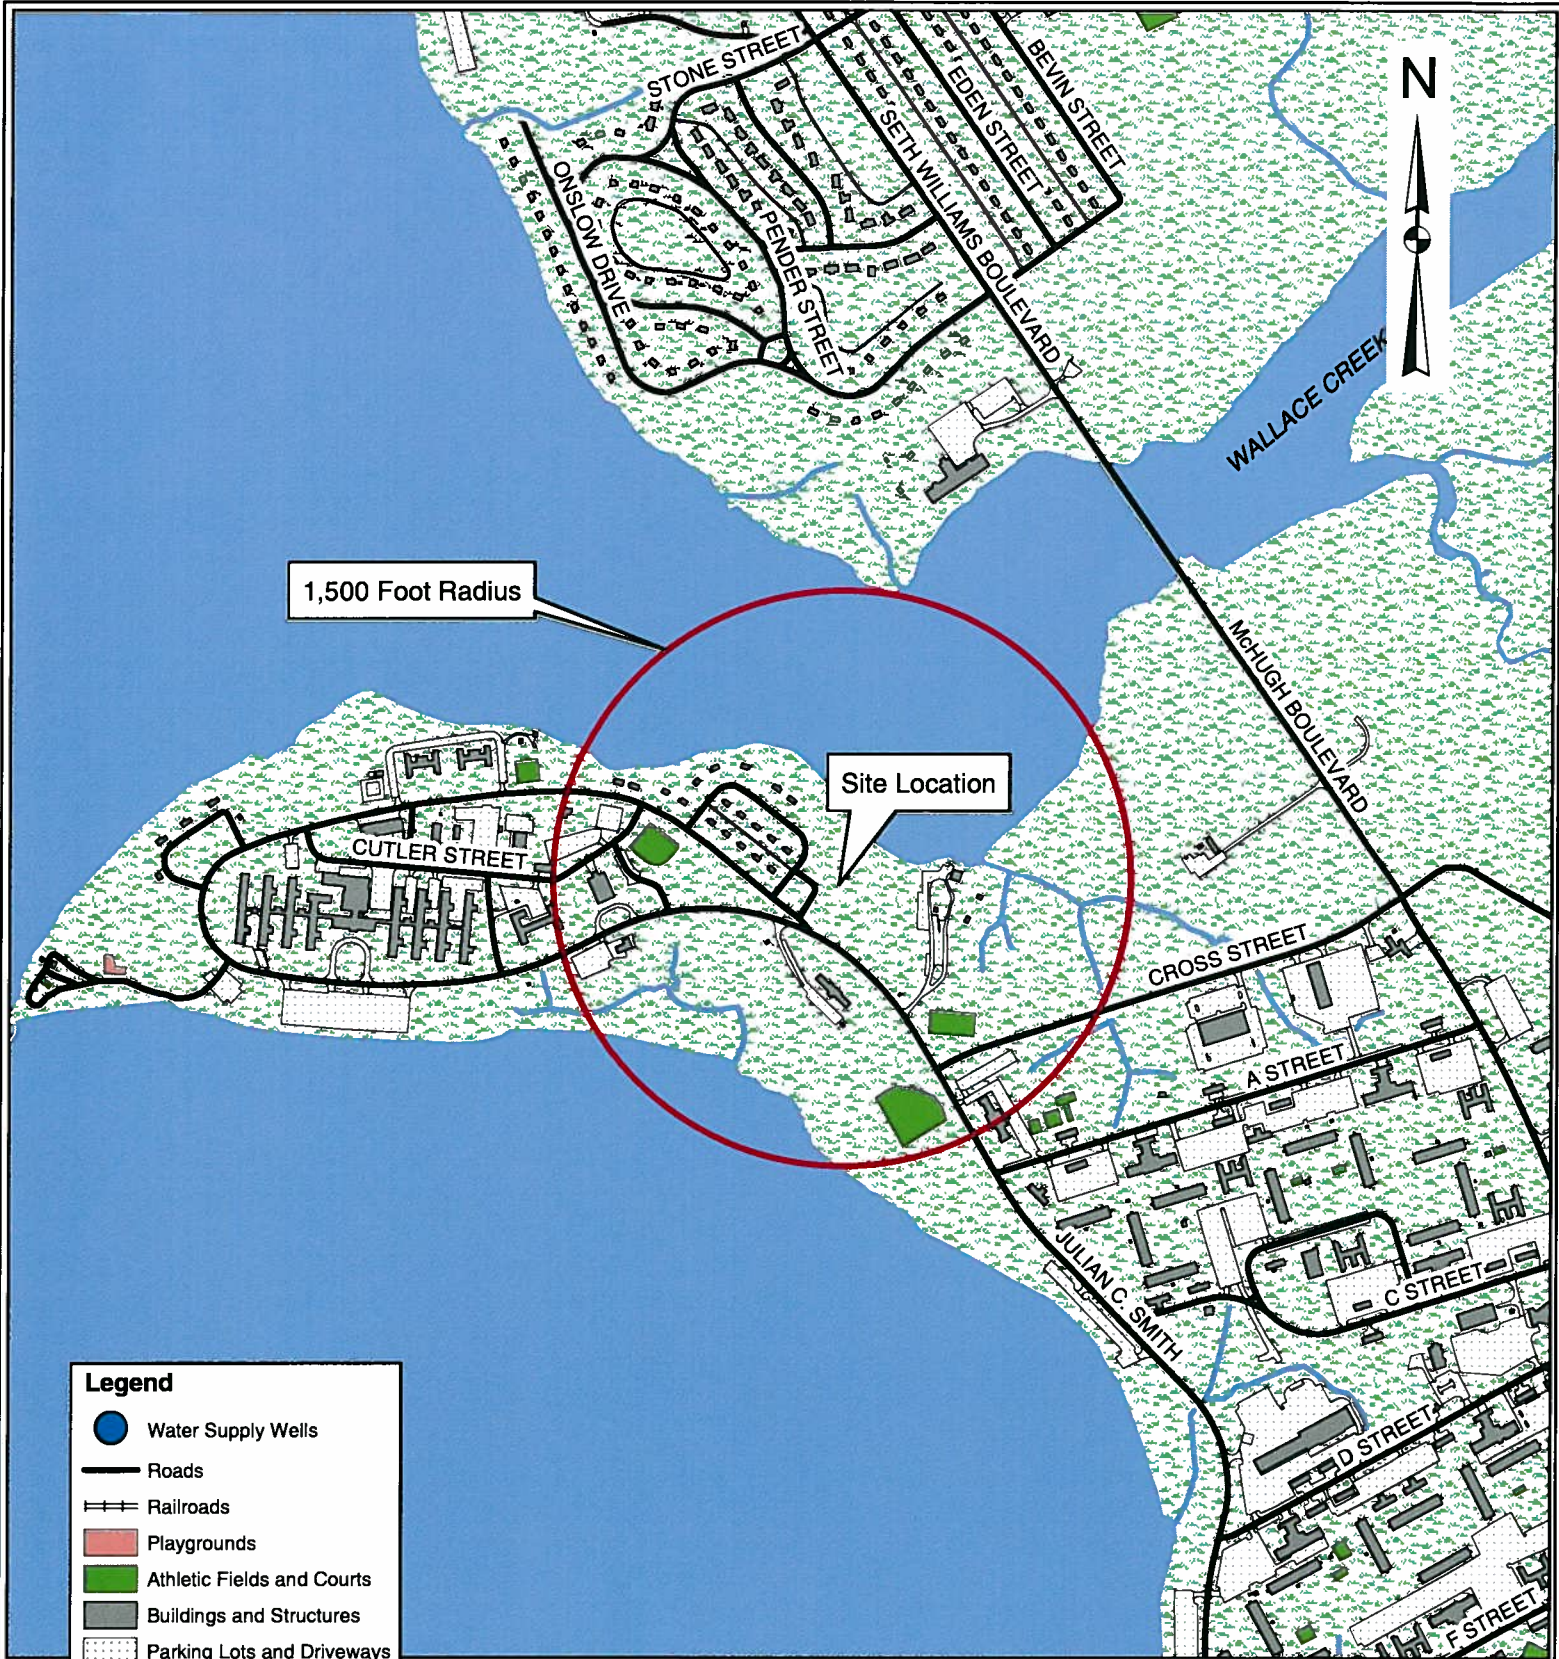


1,500 Foot Radius

Site Location

**Legend**

- Water Supply Wells
- Roads
- Railroads
- Playgrounds
- Athletic Fields and Courts
- Buildings and Structures
- Parking Lots and Driveways
- Surface Water



Data Sources: Data Layers provided by MCB Camp Lejeune GIS Office.

	PROJECT <b>GROUNDWATER SAMPLING          REPORT OF FINDINGS          SITE H-30          MARINE CORPS BASE          CAMP LEJEUNE, NC</b>		TITLE <b>SITE LOCATION MAP</b>		<b>FIGURE</b>  <span style="font-size: 2em; font-weight: bold;">1</span>
	JOB NO. 205-077	DATE OCT 2007	SCALE AS SHOWN	DRAWN BY SAC	CHECKED BY MEM

**GROUNDWATER SAMPLING  
REPORT OF FINDINGS  
SITE H-30  
MCB CAMP LEJEUNE, NC**



**LEGEND**

- ⊕ DPT Well
- Water Supply Wells
- Above Ground Storage Tank
- Underground Storage Tank
- Railroad Tracks
- ⊗ FENCE
- ⊗ GATE
- WALL
- Buildings and Structures
- Demolished Structures
- Oil/Water Separators
- Slabs
- Roads
- Driveways
- Parking Lots
- Surface Water Bodies
- Creeks and Streams
- Forestland
- Scrubland
- Wetland
- Airfield Pavement
- HELIPAD
- RAMP
- RUNWAY
- SHLDR\_OVERRUN
- TAXIWAY

**NOTES**

GIS data layers provided by the MCB Camp Lejeune GIS Department.

All results in micrograms per liter (ug/L)


NE = None Established

< = less than method detection limit


**concentrations exceed the 2L GWQS or GCL**

GCL = Gross Contaminant Level


2L GWQS = NCAC T15A:02L Groundwater Quality Standards



<b>SITE MAP WITH SUMMARY OF GROUNDWATER LABORATORY RESULTS</b>		<b>FIGURE 2</b>
Job No.: 205-077	Date: OCT 2007	Scale: AS SHOWN
Drawn By: SAC	Checked By: MEM	

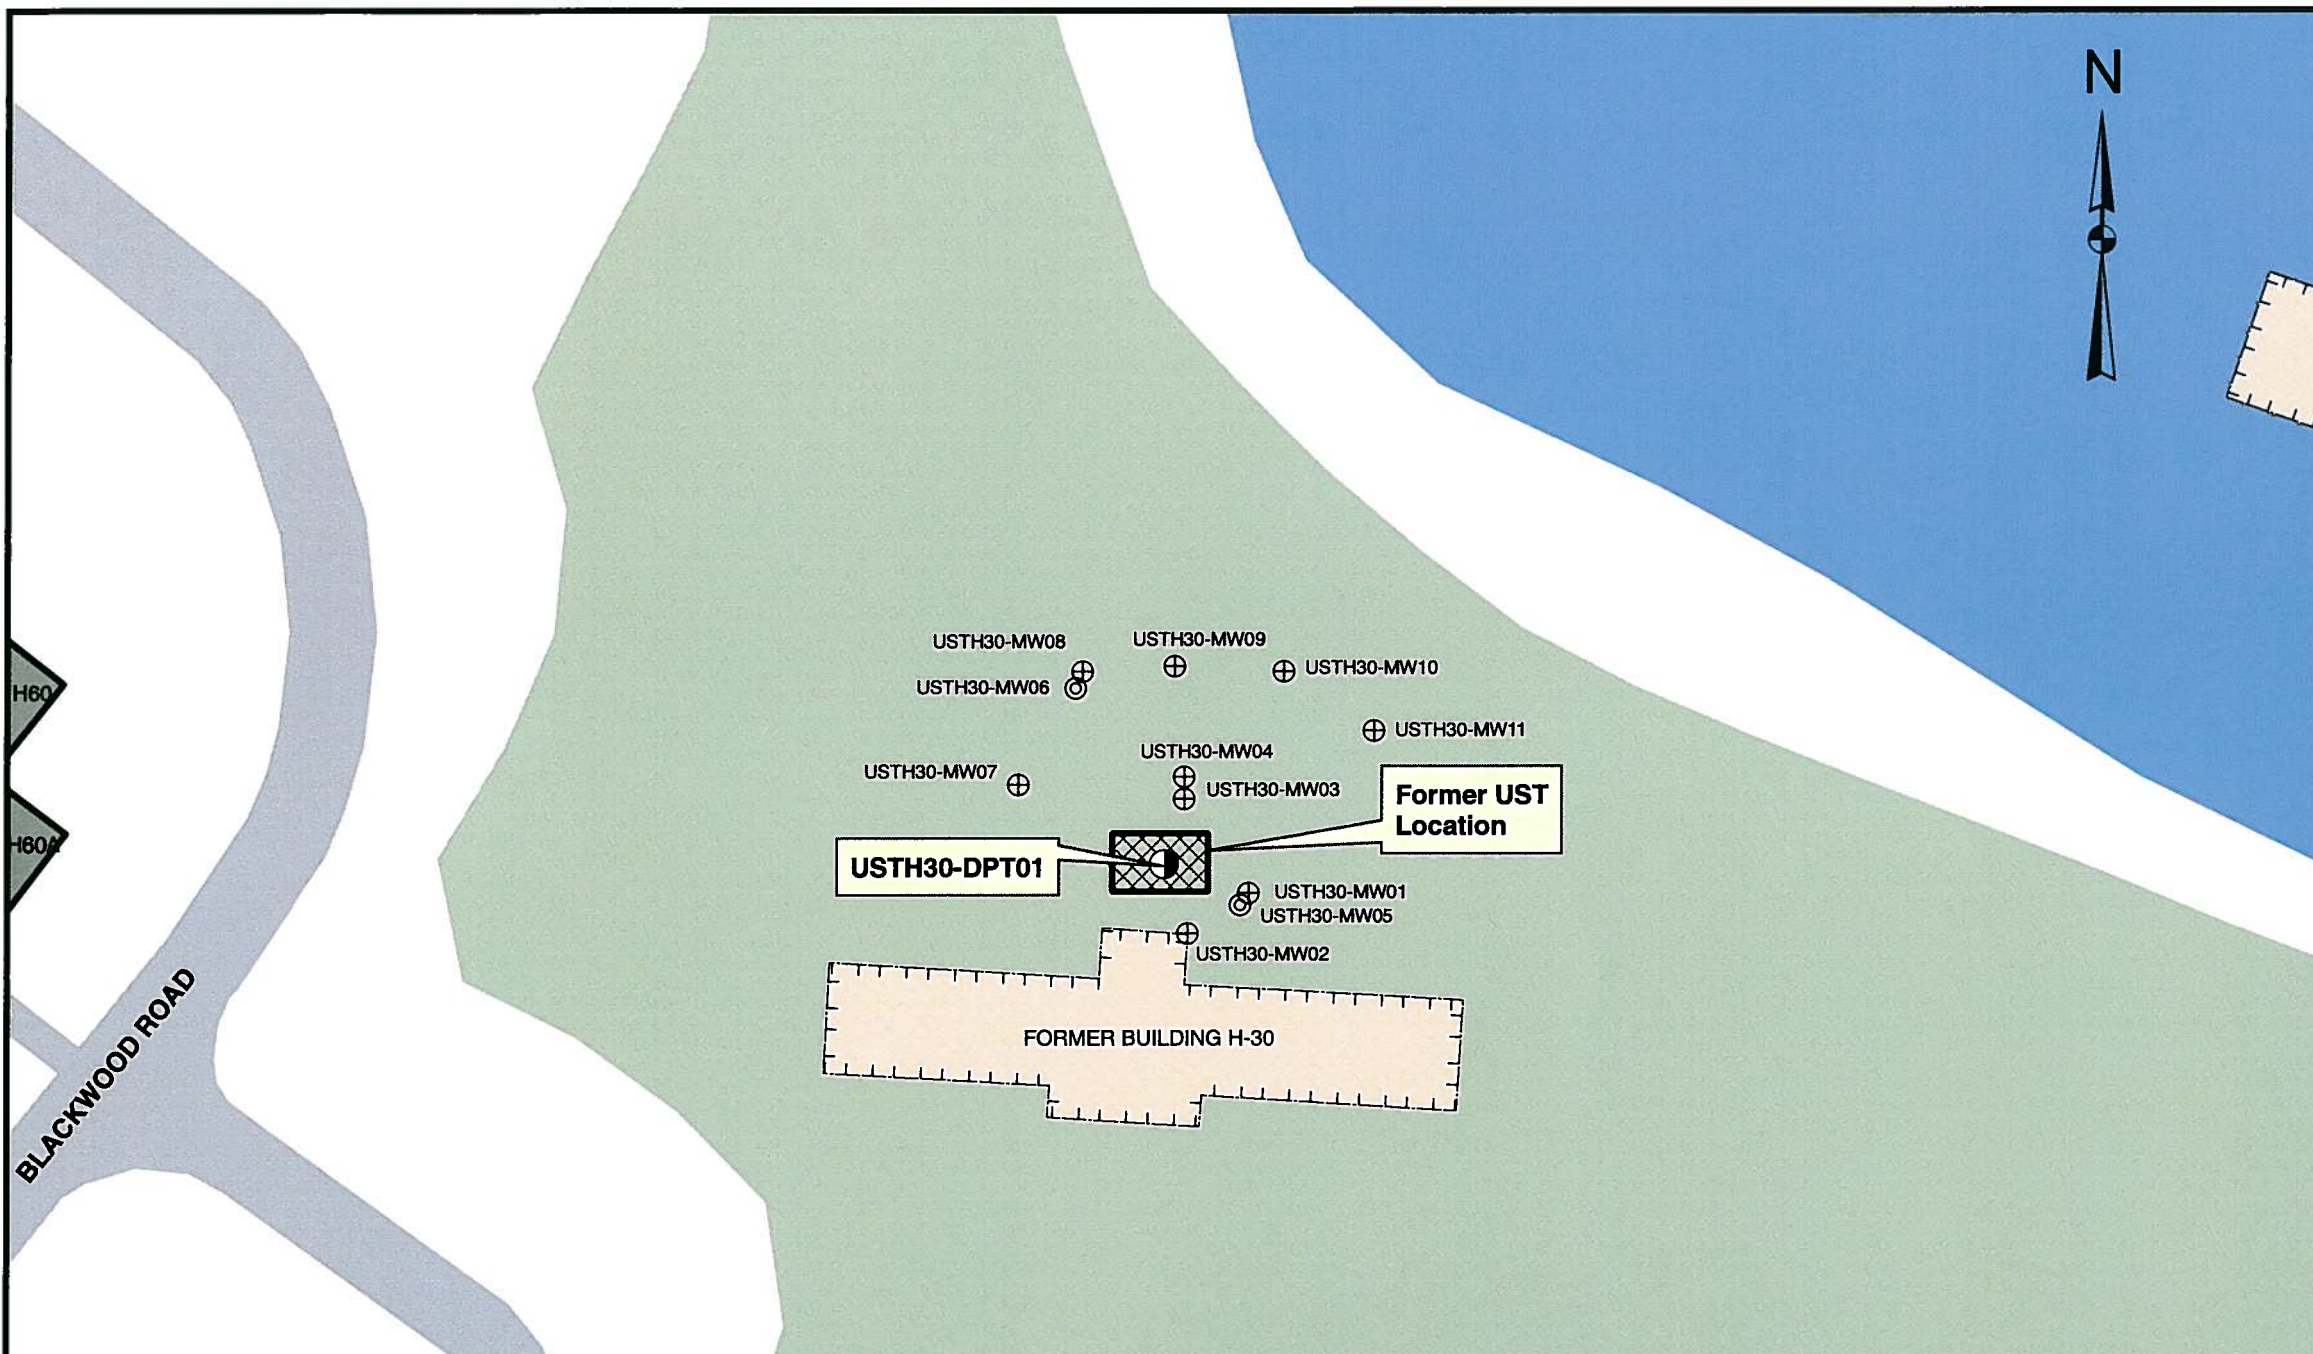

Well ID	Method →		MADEP VPH/EPH			
	Contaminant of Concern →		C <sub>5</sub> -C <sub>8</sub> Aliphatics	C <sub>9</sub> -C <sub>18</sub> Aliphatics	C <sub>19</sub> -C <sub>36</sub> Aliphatics	C <sub>9</sub> -C <sub>22</sub> Aromatics
Sample ID	Date Collected					
	GCL (µg/L)		NE	NE	NE	NE
	2L GWQS (µg/L)		420	4,200	42,000	210
USTH30-DPT01	USTH30-DPT01	7/31/2007	<100	<203	<100	<b>&lt;290</b>



## **APPENDICES**

**APPENDIX A**  
**STANDARD PROCEDURES**

# CATLIN STANDARD METHODS OF INVESTIGATION

## 1.0 DATA COLLECTION

### 1.1 BACKGROUND DATA

Background data and history information relevant to the site investigation is generated through numerous sources. These sources may include, but are not limited to, the following:

- Conversations with the client and regulatory officials involved with the incident.
- Review of pertinent regulatory correspondence.
- Review of previous and existing reports and other technical data.
- Review of available historical records.

### 1.2 SURVEYS AND POTENTIAL RECEPTOR DATA

Physical survey and potential receptor data are collected in accordance with the intended level of investigation. In general, the purpose is to collect sufficient information for site assessment and corrective action planning.

Individual receptors are identified and evaluated in the context of their potential for contaminant impact. Potential receptors of contamination can include surface water bodies, groundwater supply wells, wellhead protection areas, and subsurface building structures.

#### 1.2.1 Horizontal Survey

Horizontal survey data are generated using either accepted general field surveying techniques, or existing survey maps; or by using a combination of existing data and field generated information. The survey area generally extends to a point at least 50 feet beyond suspected plume boundaries. A receptor scale survey of a larger area surrounding a site will be made if appropriate and necessary.

#### 1.2.2 Vertical Survey

A vertical survey is conducted at the site typically within an accuracy of 0.01 foot. The datum plane is generally assumed unless otherwise noted. Assumed temporary benchmarks (TBM) are selected near ground level. The vertical survey includes such points as top of all well casings, selected ground shots, important utility inverts, utility fluid levels, important surface water levels, and other items determined to be significant.

### **1.3 DRILLING AND MONITORING WELL/PIEZOMETER INSTALLATION**

Necessary permits are applied for and obtained in accordance with federal, state, and local requirements prior to drilling or well construction activities. Additionally, the well locations are scanned for underground utilities prior to conducting intrusive subsurface activities. Wells are installed under applicable licensing requirements, and are designed and constructed in accordance with accepted standards and practices. Any wells purposely installed at off-site locations are permitted through appropriate right-of-entry agreements with all necessary property owners and/or their agents.

#### **1.3.1 Drilling Methods and Subsurface Data Collection**

Drilling is accomplished utilizing one or more of the following methods:

##### ***Auger Drilling***

Auger drilling is the preferred, most often used method of subsurface investigation and is accomplished using a vehicle or trailer mounted drill rig. Continuous flight auger types used vary upon the site and situation; ranging from the 4-inch outside diameter solid stem to the 12-inch outside diameter hollow stem. Auger type is selected based upon appropriateness and/or site-specific requirements.

##### ***Hand Augering***

Hand augering is utilized when economically and scientifically feasible, or when no other method is suitable. Hand augers typically produce three-inch diameter holes and are generally limited to depths of less than 15 feet.

##### ***Direct Push***

Direct push methods of subsurface investigation are used generally for soil screening purposes or collection of groundwater samples where permanent wells are not viable.

##### ***Other Methods***

Other drilling methods, such as mud and air rotary, rock coring, cable tool, and large bucket augering are used when site conditions or project requirements dictate.

Regardless of the drilling method used, the drill rig(s) and all drilling tools are thoroughly cleaned between boreholes to prevent cross introduction of contaminants. Split spoon samples are collected and field-described at intervals of five feet or less, and cuttings are continuously monitored for organic vapors. Drill cuttings are containerized for off-site disposal or are spread on the ground surface in proximity to the well or boring in accordance with North Carolina Department of Environment and Natural Resources (NCDENR) requirements. A geologist or engineer, trained in using visual/manual techniques, is always present during drilling and is

responsible for subsurface contaminant and geologic data collection. Soils are classified in general agreement with the Unified Soils Classification System (USCS).

### **1.3.2 Hydropunch Installation**

Hydropunch penetrometers (Hydropunches) are used to delineate the spatial extent of dissolved and free phase plumes. Soil borings are advanced to the appropriate depth and then the Hydropunch is advanced through the soil boring into undisturbed material. Groundwater samples are collected by pulling back on the body of the Hydropunch and allowing the groundwater to enter the screened portion of the sample chamber. Samples are retrieved using a decontaminated Teflon bailer or peristaltic pump.

### **1.3.3 Well Installation**

Wells are typically constructed of threaded PVC casing and screen. No glues or cements are used in joining PVC components. Well diameter, slot sizes, and protective covers vary depending upon site-specific conditions or situation-specific requirements.

### **1.3.4 Well Development**

Wells are developed by over-pumping or surging using appropriate pumps, blocks, or bailers. Through development, unwanted fine materials are removed from the natural formation surrounding the well. Well development will be performed no sooner than 24-hours after grouting is completed for the Type III wells. Water generated during development is containerized and properly disposed or is discharged onto the ground in proximity of the well in accordance with NCDENR requirements.

## **1.4 HYDROGEOLOGIC DATA COLLECTION**

Data used to help characterize hydrogeologic conditions at a site are obtained through various procedures including, but not necessarily limited to, those described below:

### **1.4.1 Regional Geology**

Information pertaining to the regional geologic framework is compiled from existing publications, maps, and scientific papers.

### **1.4.2 Site Geology**

Shallow site geology is generally determined from field descriptions and borehole samples. Interpretations with regard to hydrogeologically important contacts, zones, fractures, faults, cleavage, and facies changes are made when possible.

### **1.4.3 Groundwater Occurrence and Characteristics**

Groundwater data is obtained utilizing a number of methods and procedures, not limited to the general list below:

#### ***Well Water Levels***

After well development, wells are allowed to stabilize for a minimum of 24 hours prior to measuring. Water level and free product thickness (where applicable) measurements are performed using an electronic interface probe or steel tape with water/product finding pastes.

The specific gravity of any accumulated product is determined and used to calculate true hydraulic grade from measured water levels. This information is combined with vertical survey data to determine relative potentiometric surface elevations for all wells.

#### ***Aquifer Testing***

Various aquifer tests may be used to make determinations of hydraulic conductivity. Slug or pumping tests are often used to characterize site hydrogeologic conditions and to develop remedial action alternatives utilizing appropriate pumping technologies.

#### ***Other Methods***

Other methods may be deemed appropriate for determining various groundwater characteristics. These other methods may include nested well configurations and/or clustered piezometer installations; sieve or pipette analysis; fracture trace analysis; computer modeling; and geophysical logging.

## **1.5 PETROLEUM HYDROCARBON DATA COLLECTION**

### **1.5.1 Collection Methods**

Petroleum hydrocarbon data is obtained through various methods including, but not limited to, the following:

#### ***Field Analysis***

- Direct thickness measurement of phase separated components using tapes and/or probes.
- Manual vapor analysis using a photoionization detector (PID) or flame ionization detector (FID).
- Detectable odor and visual observation.

#### ***Laboratory Analysis***

- Laboratory analysis of phase-separated products.

- Laboratory vapor, soil, and groundwater analysis using appropriate EPA Methods.

## **1.5.2 Field Sampling**

Field sampling procedures are performed in accordance with recommended protocol, accepted industry standards, and under appropriate chain-of-custody procedures. Generally, sampling procedures are as follows:

### ***Product Samples***

Product samples are obtained using clean equipment and containers. Each is shipped to the analytical laboratory in protective containers.

### ***Vapor Samples***

PID/FID readings are measured from soil sample headspace using containerized samples that have been brought to ambient temperature.

Carbon tubes are utilized in conjunction with a laboratory-calibrated vacuum pump to obtain vapor samples. The carbon tubes are sealed and refrigerated for shipment to the analytical laboratory (This method is known as the Carbon Adsorption Method).

### ***Soil Samples***

Soil samples are immediately packed into clean containers, and refrigerated for shipment to the analytical laboratory.

### ***Groundwater Samples***

Groundwater samples are collected in accordance with the following procedures:

- Creeks/Lakes/Etc.

Grab samples are obtained.

- Domestic Wells

Wells are pumped for a time sufficient to completely purge the well and any pressure or holding tanks prior to sampling.

- Monitoring Wells

Water level measurements are made and well volumes calculated for each well.

Three well volumes are removed from each well using a thoroughly cleaned Teflon bailer or appropriate purging pump. If it is not possible to

remove three volumes, due to very low yields, a minimum of one volume is removed prior to obtaining a sample.

Where analysis for metals is required, wells are typically sampled utilizing low flow techniques, which reduce turbidity and the potential for matrix interference.

Samples are collected and containerized in a manner that minimizes agitation and contact with the air.

Sampling records are field prepared.

Samples are labeled and proper Chain-of-Custody documents are maintained.

Samples are promptly protectively packed, refrigerated, and shipped to the analytical laboratory for analysis.

## **2.0 DATA EVALUATION**

Data obtained as a result of the site investigation is compiled and evaluated and a report is prepared for client review and distribution to the appropriate agencies. Generally, specific data are evaluated as follows:

- Background data are evaluated in context with the suspected or confirmed problem.
- Survey data are utilized to develop site maps and to evaluate contaminant receptors.
- Well construction records are compiled and presented as part of the report. As-built information is used in combination with other data to evaluate subsurface conditions and monitoring well screen settings as they relate to the investigation.
- Subsurface drilling logs are used to develop geologic cross-sections, fence diagrams, isopaths, structure contours, or other constructions. Regional geologic data are used to obtain an overall framework.
- Hydrogeologic data are used to develop contour maps, flow nets and other constructions. The data is also used to calculate various hydrogeologic parameters that describe aquifer characteristics.
- Hydrocarbon data are utilized to develop various plume geometry and isoconcentration maps.
- All data are compiled and utilized for making specific recommendations with regard to remedial action alternatives.

**APPENDIX B**  
**BORING LOG**

# WELL LOG

**CATLIN**


ENGINEERS and SCIENTISTS  
205-077  
Wilmington, NC

SHEET 1 OF 1

PROJECT NO.: 205-077	STATE: NC	COUNTY: Onslow	LOCATION: Jacksonville
PROJECT NAME: Lejuene LUR Sites		LOGGED BY: J Heter	WELL ID: USTH30-DPT01
DRILLER: Bobbie D. Fowler		CREW: T Stetler	
NORTHING: 3839747.7	EASTING: 283448.1	SYSTEM: UTM NAD83 (m)	
DRILL MACHINE: Power Probe		BORING LOCATION: In woods back of property	T.O.C. ELEV.:
START DATE: 7/27/07	FINISH DATE: 7/27/07	0 HOUR DTW: dry	TOTAL DEPTH: 16.0
METHOD: Direct Push		24 HOUR DTW: 5.2	WELL DEPTH: 16.0

DEPTH	BLOW COUNT				OVA (ppm)	LAB.	USCS	LOG	DEPTH	SOIL AND ROCK DESCRIPTION	WELL DETAIL
	6in	6in	6in	6in							
0.0									0.0	LAND SURFACE	0.0
2.0					0.0		SP/SM		2.0	Organic layer 3" Dark brown fine SAND to SILTY SAND. Dry.	
4.0					0.0		SM/CL		4.0	Brown fine SAND to SILTY SAND grading into SANDY CLAY. Medium plasticity. Medium stiff. Moist.	1" Sch. 40 PVC
6.0					102.6		CL		6.0	Brown SANDY CLAY. High plasticity. Medium stiff. Wet.	
8.0					73.9		CL		8.0	Gray SANDY CLAY. High plasticity. Soft. Wet. Sat. @ 7.5'	
10.0					81.4		CL		10.0	S.A.A.	
12.0					0.0		CL		12.0	S.A.A. except medium stiff and some gravel/rocks.	1" Slot .010 Sch. 40 PVC
14.0					0.0		CL		14.0	Gray CLAY w/ high plasticity and soft. Grades to SANDY CLAY w/ medium plasticity and medium stiff.	
16.0					0.0		CL		16.0	S.A.A.	
									16.0	Boring Terminated at Depth 16.0 ft CLAY to SANDY CLAY.	16.0

CATLIN BORING LOG - 205-077 LEJUENE LUR SITES.GPJ TEST.GDT 8/20/07

 Bentonite Pellets

**APPENDIX C**

**LABORATORY ANALYTICAL REPORT AND  
CHAIN OF CUSTODY DOCUMENTATION**



Mr. Shane Chasteen  
Richard Catlin & Associates  
P.O. Box 10279  
Wilmington NC 28404-0279

Report Number: G128-1996

Client Project: Lejuene LUR Sites


Dear Mr. Chasteen:

Enclosed are the results of the analytical services performed under the referenced project. The samples are certified to meet the requirements of the National Environmental Laboratory Accreditation Conference Standards. Copies of this report and supporting data will be retained in our files for a period of five years in the event they are required for future reference. Any samples submitted to our laboratory will be retained for a maximum of thirty (30) days from the date of this report unless other arrangements are requested.

If there are any questions about the report or the services performed during this project, please call SGS/Paradigm at (910) 350-1903. We will be happy to answer any questions or concerns which you may have.

Thank you for using SGS/Paradigm Analytical Labs for your analytical services. We look forward to working with you again on any additional analytical needs which you may have.

Sincerely,  
SGS/Paradigm Analytical Laboratories, Inc.

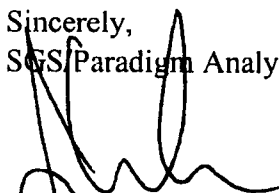  
\_\_\_\_\_  
Laboratory Director  
J. Patrick Weaver

8/8/2007  
Date



**List of Reporting Abbreviations  
and Data Qualifiers**

**B = Compound also detected in batch blank**

**BQL = Below Quantitation Limit (RL or MDL)**

**DF = Dilution Factor**

**Dup = Duplicate**

**D = Detected, but RPD is > 40% between results in dual column method.**

**E = Estimated concentration, exceeds calibration range.**

**J = Estimated concentration, below calibration range and above MDL**

**LCS(D) = Laboratory Control Spike (Duplicate)**

**MDL = Method Detection Limit**

**MS(D) = Matrix Spike (Duplicate)**

**PQL = Practical Quantitation Limit**

**RL = Reporting Limit**

**RPD = Relative Percent Difference**

**mg/kg = milligram per kilogram, ppm, parts per million**

**ug/kg = micrograms per kilogram, ppb, parts per billion**

**mg/L = milligram per liter, ppm, parts per million**

**ug/L = micrograms per liter, ppb, parts per billion**

**% Rec = Percent Recovery**

**% solids = Percent Solids**

**Special Notes:**

**1) Metals and mercury samples are digested with a hot block, see the standard operating procedure document for details.**

**2) Uncertainty for all reported data is less than or equal to 30 percent.**

**EPH (Aliphatics/Aromatics) Results**

by MDEP-EPH

Client Name: Richard Catlin & AssociatesProject Name: Lejuene LUR Sites

Sample Information and Analytical Results	
Sample Identification	USTH30-DPT01
Sample Matrix	Water
Date Collected	07/31/07
Date Received	07/31/07
Date Extracted	08/02/07
Date Analyzed	08/07/07
Dry Weight	
Dilution Factor	1:1
C <sub>9</sub> -C <sub>18</sub> Aliphatics*	< 100 (ug/L)
C <sub>19</sub> -C <sub>38</sub> Aliphatics*	< 100 (ug/L)
C <sub>11</sub> -C <sub>22</sub> Aromatics*	190 (ug/L)
Aliphatic Surrogate % Recovery	67
Aromatic Surrogate % Recovery	74
Fractionation Surrogate 1 % Recovery	73

**Comments:**

\* = Excludes any surrogates or internal standards.

Lab info: G128-1996-1D

Reviewed By: 



**VPH (Aliphatics/Aromatics) Laboratory Reporting Form**

Client Name: Richard Catlin & Associates

Project Name: Lejuene LUR Sites

Sample Information	
Sample Identification	USTH30-DPT01
Sample Matrix	Water
Collection Option (for Soil)*	NA
Date Collected	07/31/07
Date Received	07/31/07
Date Extracted	08/02/07 22:04 - 08/02/07 22:04
Date Analyzed	08/02/07 22:04 - 08/02/07 22:04
Dry Weight	NA
Dilution Factor	1 - 1

Analytical Results				
Analyte	Result µg/L	Report Limit µg/L	Flags	
C <sub>5</sub> -C <sub>8</sub> Aliphatics**	BQL	100		
C <sub>9</sub> -C <sub>12</sub> Aliphatics**	103	100		
C <sub>9</sub> -C <sub>10</sub> Aromatics**	BQL	100		
	Percent Recovery	Flags	Limits Lower   Upper	
Surrogate % Recovery - PID	98.1		70	130
Surrogate % Recovery - FID	94.4		70	130

\* = Option 1 = Established fill line on vial, Option 2 = Sampling Device/Brand, or Option 3 = Field weight of soil.  
 \*\* = Excludes any surrogates or internal standards and are unadjusted for individual analytes.

Lab Info: g128-1996-1c	Lab Info: g128-1996-1c
FID Info: VP080207/028F0101.D	PID Info: VP080207/028R0101.D


Reviewed By: lw



**CHAIN OF CUSTODY RECORD**  
**SGS Environmental Services Inc.**

- Locations Nationwide
- Alaska
  - Ohio
  - New Jersey
  - West Virginia
  - Hawaii
  - Maryland
  - North Carolina
- www.us.sgs.com

0784



1 CLIENT: Catlin

CONTACT: Shane Chasteen PHONE NO.: (910) 452-5861

PROJECT: Lejuene LVR sites SITE/PWSID#: 205-077

REPORTS TO: Shane Chasteen E-MAIL: \_\_\_\_\_

INVOICE TO: Sheila Smith QUOTE # D00 101

P.O. NUMBER 270726-1

SGS Reference: G 128-1996 PAGE 3 OF 3

LAB NO.	SAMPLE IDENTIFICATION	DATE	TIME	MATRIX	CONTAINERS	SAMPLE TYPE	Preservatives Used	Analysis Required			REMARKS
								HCl	HCl	HCl	
	USTH30-DPT01	7/31/07	1000	W	3	C	EPH	1	2		
	USTTT3165-DPT01		1115	I	3	I	VPH	1	2		* Results in Summary & Lejuene EDD format
	USTTT3233-DPT01		1345	I	3	I				3	
	USTTC912-MW02(DPT01)		1330	I	3	I				3	

5

Collected/Relinquished By: (1) <u>Justin [Signature]</u>	Date <u>7/31/07</u>	Time <u>1600</u>	Received By: <u>[Signature]</u>	Date <u>7/31/07</u>	Time <u>1600</u>
Relinquished By: (2)	Date	Time	Received By:	Date	Time
Relinquished By: (3)	Date	Time	Received By:	Date	Time
Relinquished By: (4)	Date	Time	Received By:	Date	Time

4

Shipping Carrier: \_\_\_\_\_

Shipping Ticket No: \_\_\_\_\_

Special Deliverable Requirements: \_\_\_\_\_

Special Instructions: \_\_\_\_\_

Requested Turnaround Time: \_\_\_\_\_

RUSH  STD

Date Needed: \_\_\_\_\_

Samples Received Cold? (Circle) YES NO

Temperature (C): 4.50C

Chain of Custody Seal: (Circle) INTACT BROKEN ABSENT

N.C. CERTIFICATION #481

SGS ENVIRONMENTAL SERVICES, INC.

16 of 16